



NWL0001597794A 8/23



Do not install or use this child restraint until you read and understand the instructions in this manual.

FAILURE TO PROPERLY USE THIS CHILD RESTRAINT INCREASES THE RISK OF SERIOUS INJURY OR DEATH IN A SUDDEN STOP OR CRASH.

1 Important

Pages 5-19

Pages 20-23

- **1-A Quick Guide to Your Manual**
- 1-B Welcome to the Graco Family
- 1-C Before You Begin
 - Register This Car Seat If You Need Help Certification Car Seat's Useful Life Vehicle Seat Protection Warm Weather Use
- 1-D Safety Warnings

2 Features

2-A Car Seat Features

Booster Use Install Booster

3 Booster

3-A

3-B

3-C Install Backless Booster

4 Securing Child

- 4-A Securing Child Backed Booster
- 4-B Securing Child Backless Booster

5 Accessories

Pages 24-32

Page 43

Pages 33-42

6 Vehicle Information

- 6-A How to Uninstall Lower Anchor Connectors
- 6-B Choosing Vehicle Seat Location
- 6-C Unsafe Vehicle Seat Location
- 6-D Vehicle Seat Belts

7 Care & Cleaning

- 7-A Cleaning Seat Pad
- 7-B Cleaning Lower Anchor Straps

Pages 49-50

Pages 44-48

1-A Quick Guide to Your Manual

This car seat is for children:

Booster: 40-110 lb (18.1-50 kg) 43-57 in. (110.1-145 cm)


Car Seat Assembly (On Select Models)


Adult Assembly Required 1. Armrests


To attach armrests to base, press armrests into opening in base. **CHECK** to make sure armrests are securely attached by pulling up on them.

2. Cupholder


Remove cupholder from compartment in bottom of base. Align tabs on side and bottom of cupholder with their slots in base and press cupholder into place.












3. Seat Pad

Wrap seat pad around front of base and attach with

elastic straps as shown.






4. Back support pad

On certain models, your lower back support pad may not be attached to the back support. Place

lower back support pad around edges of support as shown. Then fasten lower elastic strap to the metal hook on the other side of the seat pad.






5. Head support

Flip head support and lower back support over as shown.


Squeeze adjustment button and slide two pieces together until they snap into place.

CHECK to make sure two pieces are securely snapped together by pulling on them.

Attach elastic strap to metal hook on other side of seat pad as shown.



mportan



1 Important

6. Head support pad

Flip seat over and insert the fabric from the head support underneath the fabric on the lower back support as shown.

To make insertion of fabric easier, slide the upper and lower back pieces apart by squeezing the adjustment button.


7. Backrest

Attach backrest to base. "U"-shaped hooks on bottom of backrest will interlock with bars on base.

Make sure that no part of the seat covering interferes when attaching backrest to the base.

Once backrest is securely attached to the base, push backrest up as shown.

Your Graco booster seat is now ready to use.



Get to Know Your Car Seat

Review section 2-A to see all of the features of this booster seat.

What Seating Location Should I Use?

The best seating location for this booster seat is one that:

- · Is recommended by your vehicle owner's manual, and
- Results in a secure installation of this booster seat.

Some vehicles have specific requirements for where the booster seat can be installed, so be sure to check your vehicle owner's manual for available seating positions, if any. For example, sometimes the center rear seat has a lap belt only vehicle seat belt, which cannot be used with this booster seat.

Review section 6-B, 6-C, 6-D of this manual AND your vehicle owner's manual.

According to accident statistics, the safest place for your child in any vehicle is the back seat. The center of the back seat can be the safest during a possible side impact.



Using The Car Seat Correctly To make sure your child is secured properly, review section 3 and 4 to fit your child. When Installing As a Booster Important **Lower Anchor Attachment** The lower anchor system consists of two lower anchors, which are built-in to your vehicle, and lower anchor connectors that are built-in your car seat. Review section 3 of this manual AND your vehicle owner's manual Vehicle Seat Belt There is one type of vehicle seat belt that can be used: Lap/Shoulder Seat Belt. Review section 3 of this manual AND your vehicle owner's manual. 11



Booster Installation

Use Lap/Shoulder Belt Only

Review section 3

Position Lap Belt

Lap belt must go in front of armrest and lie low across your child's hips and thighs.

Review section 3

Position Shoulder Belt

Shoulder belt lies across shoulder between neck and edge of shoulder. Review section 3



1-B Welcome to the Graco Family!

Your child's safety depends on you. No car seat can guarantee protection from injury in every situation, but proper use helps reduce the risk of serious injury or death. Even if this car seat seems easy to figure out on your own, you must follow the detailed instructions in this instruction manual to ensure the steps below are performed correctly.

1-C Before You Begin

Register This Child Restraint

Please fill out the prepaid registration postcard attached to the seat pad and mail it in today **or register online at www.gracobaby.com/carseatregistration.**

Child restraints could be recalled for safety reasons. You must register this restraint to be reached in a recall. Send your name, address, and the restraint's model number and manufacturing date to:

Graco Children's Products, Inc. Attn: Customer Service P.O. Box 169, Elverson, PA 19520-9901

or register online at www.gracobaby.com/carseatregistration or call 1-800-345-4109

For recall information, call the U.S. Government's Vehicle Safety Hotline at 1-888-327-4236

(TTY: 1–800–424–9153), or go to http://www.NHTSA.gov.

For future reference or if you change addresses, record the model name, model number, date of manufacture and purchase date of this car seat on the below. You can find this information either on the registration card if you still have it or on the date label located on the back of the car seat.

Model Name	
Model Number	
Date of Manufacture	
Date of Purchase	

If You Need Help

In the U.S.A, please contact our Customer Service Department with any questions you may have concerning parts, use, or maintenance. When you contact us, please have your product's model number and date of manufacture ready so that we may help you efficiently. These numbers can be found on a sticker on the back side of your car seat. For additional resources or to get your car seat checked by a child passenger safety technician, please visit the following web sites:

www.nhtsa.gov • www.seatcheck.org • www.safekids.org 15

Certification

This child restraint meets or exceeds all applicable requirements of Federal motor vehicle safety standard 213 for use in motor vehicles.



This child restraint is NOT certified for aircraft use when used as a booster seat because aircrafts do not have shoulder belts.

Car Seat's Useful Life

STOP using this car seat and throw it away 10 years after the date of manufacture. Look for date of manufacture label on back of the car seat.

Graco Children's Products Inc. advises against loaning or passing along a car seat unless you know the complete history of the product. We also advise against purchasing a car seat second hand.

Vehicle Seat Protection

Protect vehicle seat. Use a car seat mat, towel, or thin blanket under and behind car seat.

Warm Weather Use

Car seat parts can get very hot in the sun or warm weather. **To avoid burns, always** check before putting child in car seat.

1-D Safety Warnings

No car seat can guarantee protection from injury in every situation, but proper use helps reduce the risk of serious injury or death. **READ THIS MANUAL CAREFULLY.**

Importan

AWARNING!

Failure to follow these instructions and child restraint's labels can result in child striking the vehicle's interior during a sudden stop or crash.

! When forward-facing, children should use the built-in harness system for as long as possible until they reach the maximum forward-facing weight or height for their car seat. At that point, children should ride in a belt-positioning booster seat. A booster is no longer needed once the vehicle seat belt fits properly, typically when they reach 4 feet 9 inches (145 cm) tall and are between ages 8-12. Be sure to check your local and state laws, as well as AAP and NHTSA recommendations, for car seat usage.*

- ! Review your vehicle owner's manual for more information about air bags and car seat use.
- ! If your vehicle does not have a back seat, review your vehicle owner's manual.
- ! Select a suitable location for the car seat in your vehicle.

1 Important (–

*Graco Supports the American Academy of Pediatrics and National Highway Traffic Safety Administration's Car Seat Guidelines. Visit www.gracobaby.com/en-US/safety-information for information on car seat usage recommendations.


- **! DO NOT** use car seat if it is damaged or missing parts.
- ! Always secure car seat with the lower anchor hooks or a vehicle seat belt, even when unoccupied. In a crash, an unsecured car seat can injure passengers.
- ! If car seat is in a crash, it must be replaced. DO NOT use it again! A crash can cause unseen damage and using it again could result in serious injury or death.
- **! DO NOT** use accessories or parts other than those provided by Graco except for a thin towel or mat to protect your vehicle seat. Their use could alter the performance of the car seat.
- ! Never leave child unattended, even when sleeping.



! Never attach two lower anchor connectors to one vehicle lower anchor bar unless specifically allowed by the vehicle manufacturer.




2 Features

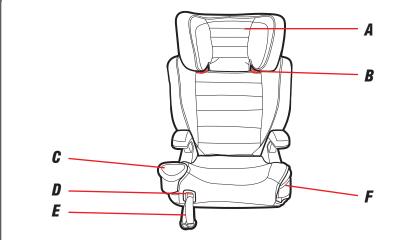

20

- A Head Support
- **B** Shoulder Belt Guide
- C Cup Holder
- D Lower Anchor Adjuster Button
- E Lower Anchor Straps
- F Storage Compartment



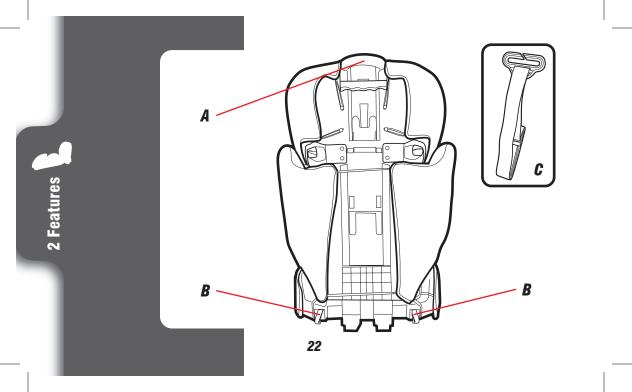

- A Head Support Adjustment Lever
- **B** Lower Anchor Connectors
- **C** Belt Positioning Clip (Inset)



3-A Booster Use



3 Booster

Vehicle Lap/Shoulder Seat Belt



Vehicle Seat Lap/ Shoulder Belt

Booster Use With Back: 40-100 lb (18.1-45 kg) 43-57 in. (110.1-145 cm) at least 4 years old

Booster Use Without Back: 40-110 lb (18.1-50 kg) 43-57 in. (110.1-145 cm) at least 4 years old

- Place car seat forward-facing in the vehicle back seat.
- Make sure vehicle seat's lap belt is adjusted snugly and lays low on the child's hip and is routed in front of the armrest in the booster's belt path.
- Vehicle belts **MUST** lie flat against child and **MUST NOT** be twisted.
- Vehicle seat's shoulder belt is adjusted snugly and should lie between child's neck and edge of shoulder.
- Never use a vehicle lap-only belt across front of child.

- **DO NOT** position vehicle shoulder belt under the child's arm or back.
- **DO NOT** allow child to slouch or slide down in the booster seat.
- **DO NOT** position vehicle belt over top of armrests.
- Vehicle's seat headrest **SHOULD NOT** create a gap between vehicle seat and booster seat.
- The front of booster seat **MUST NOT** hang over front of vehicle seat.
- If child will not keep vehicle belt properly positioned, **DO NOT** use this booster seat. Use a different car seat.

When forward-facing, children should use the built-in harness system for as long as possible until they reach the maximum forward-facing weight or height for their car seat. At that point, children should ride in a belt-positioning booster seat. A booster is no longer needed once the vehicle seat belt fits properly, typically when they reach 4 feet 9 inches (145 cm) tall and are between ages 8-12. Be sure to check your local and state laws, as well as AAP and NHTSA recommendations, for car seat usage.



3-B Install Booster



3 Booster

Graco allows the securing of the car seat with the lower anchor attachment in the booster mode. The child still **MUST BE SECURED** with the vehicle lap/ shoulder seat belt. The lower anchor attachment can be used in the booster mode regardless of the weight of the child up to 110 lb (50 kg).

Verify the following before using the lower anchor attachment in the booster mode:

• The lower anchor attachment **DOES NOT** interfere with any vehicle seat belts or buckles.

If the lower anchor attachment interferes with the vehicle seat belts or if the chosen seating position does not have lower anchor bars, you MUST store the lower anchor attachment. Always secure car seat with the lower anchor attachment or a vehicle seat belt, even when unoccupied. In a crash, an unsecured car seat can injure passengers.

1. Place Car Seat Forward-Facing in Back Seat of the Vehicle

Place forward-facing in vehicle seat. The bottom of the seat should sit as flat as possible on the vehicle seat.




Skip to Step 5 if Not Using the Lower Anchor Attachment

2. Extend the Lower Anchor Strap

For easier installation, extend the lower anchor straps to their maximum length by pressing the button on the front of the base and pulling out on the straps.








3 Booster

3. Attach Lower Anchor Connectors to Vehicle's Lower Anchor

Lower anchor straps should not be twisted.



4. Tighten the Lower Anchor Straps

Remove all the slack from the lower anchor straps by pushing on the booster and pulling straps on front of the booster.

5. Thread the Vehicle Seat Shoulder Belt Through Seat Belt Guide on the Headrest See section 4-A to secure your child.




3-C Install Backless Booster

3 Booster



Recline seat back then remove from base.



2. Place the Booster Seat Forward-Facing in the Back Seat of Vehicle

Place forward-facing on a vehicle seat that has a lap/ shoulder seat belt. The base should sit as flat as possible on the vehicle seat.

See section 4 to secure your child.

30


3. Extend the Lower Anchor Strap


For easier installation, extend the lower anchor straps to their maximum length by pressing the button on the front of the base and pulling out on the straps.




4. Attach Lower Anchor Connectors to Vehicle's Lower Anchor Bar

Lower anchor straps should not be twisted.





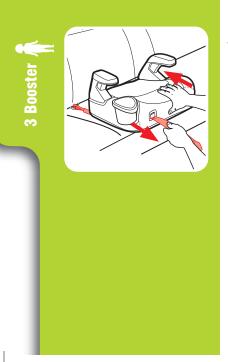

5. Tighten the Lower Anchor Straps

Remove all the slack from the lower anchor straps by pushing on the booster and pulling straps on front of the booster.

4-A Securing Child Backed Booster

AWARNING!


Use only the vehicle lap and shoulder belt system when restraining the child in the booster seat.

1. Place Child In Seat

Have your child sit in the booster seat, with his/her back flat against the back of the booster seat.

2. Thread Vehicle's Shoulder Belt Into Seat Belt Guide in the Headrest






3. To Raise or Lower Headrest Support

Lift adjustment lever and lift or lower headrest.

Check to make sure the headrest is locked securely into one of 6 height positions by pulling up and down on the head support.




4. Buckle the Vehicle Lap/Shoulder Seat Belt

Be sure the lap portion of the vehicle seat belt goes in front of both armrests and the shoulder belt goes under the armrest on the buckle side.

Be sure the lap portion of the vehicle seat belt lies low across your child's hips.

Be sure the shoulder belt lies across your child's shoulders, between the neck and edge of shoulder by raising or lowering the head support. The belt guides should be even with or just above the shoulders.

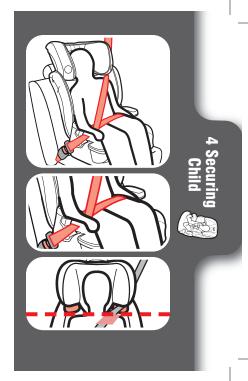

Is Everything Correct?



Never Use Lap Belt Only

Lap Belt in Front of Armrest and Lies Low Across Hips and Thighs

Shoulder Belt Lies On the Shoulder, Between the Neck and Edge of Shoulders

36

4-B Securing Child Backless Booster




Use only the vehicle lap and shoulder belt system when restraining the child in the booster seat.

1. Place Child In Seat

Have your child sit in the booster seat, with his/her back flat against the back of the vehicle seat.

2. Ears Must Be Below the Top of the Vehicle Seat Back or Headrest.





3. Buckle the Vehicle Lap/Shoulder Seat Belt

Be sure the lap portion of the vehicle seat belt goes in front of both armrests and the shoulder belt goes under the armrest on the buckle side.

Be sure the lap portion of the vehicle seat belt lies low across your child's hips.

Be sure the shoulder belt lies across your child's shoulders, between the neck and edge of shoulder.

You may need to use the belt positioning clip to help get a good fit. See "Using Belt Positioning Clip"


Is Everything Correct?

Never Use Lap Belt Only


Lap Belt in Front of Armrest and Lies Low Across Hips and Thighs

Shoulder Belt Lies On the Shoulder, Between the Neck and Edge of Shoulders





Using Belt Positioning Clip




Securi

1. Make Sure Vehicle's Seat Shoulder Belt Lays in the Red Zone As Shown

If the vehicle's seat shoulder belt lays outside this zone, you **MUST** use the belt positioning clip. **DO NOT** use the belt positioning clip if the shoulder belt is in the red zone.

2. Attach Belt Positioning Clip

The shoulder belt positioning clip **MUST** be attached to the slot on the bottom of the base. Insert the loop end of strap through the slot on bottom of seat exactly where shown.




3. Push Clip and Strap Through Loop

Pass the clip and the strap through the loop end as shown and pull strap up.


4. Free End of Strap Should Face Front of Seat



With child's back flat against the back of the vehicle seat, buckle child in. Then slide the clip onto the vehicle's seat shoulder belt as shown.





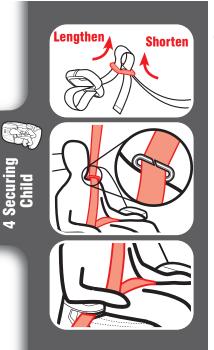

6. Adjust the Belt Positioning Clip to Fit Your Child Lengthen or shorten the belt length as shown.


Clip should fit right at the top of shoulder as shown.

Be sure the lap portion of the vehicle seat belt lies low across your child's hips.

5 Accessories (on select models)

Cup Holder

Storage Compartment



6-A How to Uninstall Lower Anchor Connectors

6 Vehicle nformatio

Lower Anchor Attachment

Push release button up on front of booster and pull slightly away from seat.

Press in on the hook's spring. Push hook in, lift hook up, twist and pull out away from anchor point.

6 Vehicle ▶ Information

6-B Choosing Vehicle Seat Location

Review your vehicle's owner manual for Seating Locations

The best seating location for this car seat is one that:

- Is recommended by your vehicle owner's manual, and
- Results in a secure installation of this car seat

In the event there is no available back seat and / or you have no other option, the National Highway Traffic Safety Administration (NHTSA) recommends that you take the following steps:

- Ensure the child is properly restrained according to their age and size
- Move the seat as far back as possible
- Make sure the child is not leaning out of position, such as leaning forward into the deployment path of the air bag
- Set the air bag ON-OFF switch, if available, to the OFF position

6-C Unsafe Vehicle Seat Location

Never install this car seat in any of the following vehicle seating locations:



6 Vehicle Information

rear-facing or side-facing vehicle seats



6-D Vehicle Seat Belts

Review your vehicle's owner manual for vehicle seat belt use

Vehicle Seat Belt Terms

Retractor

A device that winds up the unused vehicle seat belt. It is often hidden inside the panels on the walls of the vehicle or in the vehicle seatback.

Latch Plate

The male end of the seat belt with the silver tongue.

Seat Bight

The crease where the vehicle seat back and seat bottom meet.

6 Vehicle Informatior

00

6 Vehicle

Identify Your Seat Belt Type

There is one type of vehicle seat belt that can be used with this car seat:



Lap/Shoulder Belt 3 connections points. Can be used in all car seats modes of use.



Belts Forward of the Seat Bight: Some vehicles you may not get a secure fit. Read both your vehicle and car seat manuals. The following types of vehicle seat belts **CANNOT** be used safely with this car seat:



Lap Belt Only 2 connection points.



Lap Belt with Motorized Shoulder Belt



Lap Belt or Shoulder Belt Mounted on Door

7-A Cleaning Seat Pad


Refer to seat pad care tag for washing instructions.

To Remove Seat Cover

Remove elastic loops and hooks from seat as shown.

Clean with a damp sponge using mild soap and cool water. If needed, head support cover may be removed for cleaning.

Machine wash cover in cold water on delicate cycle and drip-dry. DO NOT USE BLEACH.



7 Care & Cleaning

7-B Cleaning Lower Anchor Straps

Surface wash only with mild soap and damp cloth. **DO NOT IMMERSE THE LOWER ANCHOR STRAPS IN WATER** Doing so may weaken the straps. If lower anchor straps are frayed or heavily soiled, contact Customer Service at www.gracobaby.com or 1-800-345-4109.

7 Care & Cleaning

Notes

Replacement Parts

